


### Products in Family


DRSX4200M2S/4GB (2 x 2GB 1Rx4 DIMMs)  
 DRSX4200M2/8GB (2 x 4GB 2Rx4 DIMMs)  
 DRSX4200M2/16GB (2 x 8GB 4Rx4 DIMMs)  
 DRSX4200M2D/16GB (2 x 8GB 2Rx4 DIMMs)

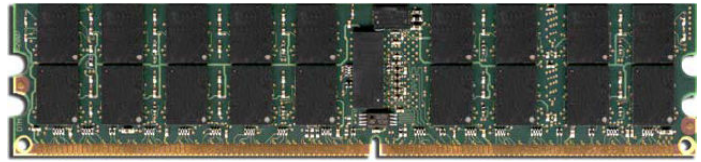

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (5.25"X1.181") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage 1.8V Fully RoHS Compliant	Each DRSX4200M2 upgrade consists of a matched pair of two DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
DRSX4200M2S/4GB DRSX4200M2/8GB DRSX4200M2/16GB DRSX4200M2D/16GB	X4226A-C X4227A-Z, X4233A Not Offered by Sun Not Offered by Sun	Sun Fire x4100M2, Sun Fire X4200 M2, Netra x4200 M2  <i>Note: The 16GB upgrades are not compatible with the Netra x4200 M2.</i>

Front view

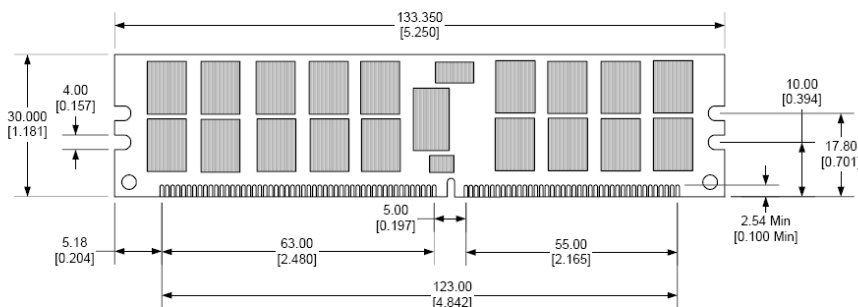


### Notes

Tolerances on all dimensions except where otherwise indicated are  $\pm 0.13$  (.005).

All dimensions are expressed in millimeters

Back view

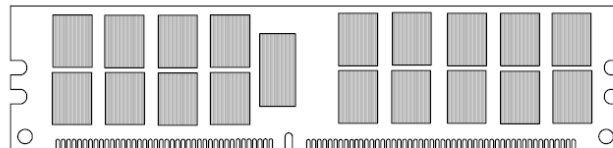

Side view

